


## DustAlarm® ES Broken Bag Detector

### FEATURES & ADVANTAGES

- ▼ **Easy Set-up and Calibration...Set it and forget it!**
  - ▼ The easy auto set-up function is activated by pressing a button to automatically establish a “clean air baseline”, scale the operating range and set the alarms.
  - ▼ Quick-connect mounting provides for ease of installation or maintenance.
- ▼ **Safety and Cost-Savings Benefits**
  - ▼ Monitor the efficiency of dust collection systems and know the optimal time to replace filters.
  - ▼ Monitor for unexpected events that can cost time, money, material loss, equipment damage and other problems.
  - ▼ Economical dust monitoring that provides an alternative to opacity detection.
- ▼ **Digital Communications and Software Capabilities**
  - ▼ Digital RS-485(Modbus) connection as an alternative to relay output and/or for connecting multiple sensors to one control system.
  - ▼ Connect with the free **DustConfig™** software to set custom alarm points, view live activity within the duct, or review data history for up to a 24-hour period.
- ▼ **Exceptional and Reliable Sensitivity**
  - ▼ Uses proven AC Triboelectric technology with advanced algorithms to filter out noise and provide the most accurate dust measurement.
  - ▼ Capable of detecting minute amounts of particles passing the probe.
  - ▼ Excellent repeatability not affected by variations in relative humidity, process temperature or pressure.
  - ▼ Unique probe design with extended Ryton® insulator helps protect the unit from false signaling due to product build up.
- ▼ **Superior Third Party Approval Compliance**
  - ▼ Ordinary and Hazardous location approvals.
  - ▼ Intrinsically safe probe for ultimate hazardous location protection.

*Practical Tip*  
DustAlarm ES is ideal for detecting early failure of a filter within a baghouse before a catastrophic tear creates an environmental disaster.

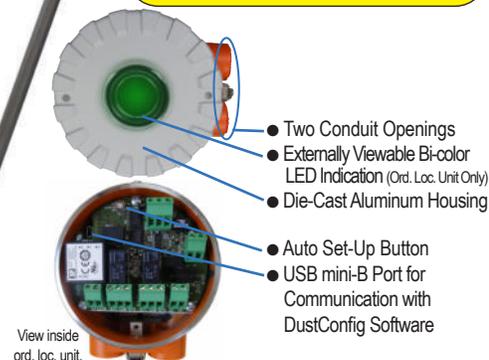

### PRINCIPLE OF OPERATION

AC Triboelectric technology has been used for broken bag detection for many years and is an accepted technology by the US EPA for dust particle emission detection (40 CFR Sec 63.1350).

The Triboelectric effect is based on particles interacting with an electrically isolated sensing probe. When moving particles pass in close proximity to the probe a very small electrical charge is transferred from the particulate to the probe. This electrical signal is then processed by the **DustAlarm® ES** via a series of advanced algorithms. The signal processing filters out other electrical charges, or electrical ‘noise’, which is not representative of the moving particles. These proprietary algorithms effectively differentiate undesirable signals from the desirable signal resulting in reliable particle emissions detection.

The **DustAlarm® ES** is designed to detect a change in the concentration of dust within the exhaust air stream of a dust collection system. When the signal generated by moving dust particles exceeds a preset threshold an alarm output is generated. See Bulletin #764A for more details.

### PRACTICAL APPLICATIONS


- ▼ Provides early detection of dust emission leaks where it is critical to safety, maintenance, equipment operation, cost-savings, reducing material loss, plant efficiency (energy-savings), good “housekeeping”, employee welfare, environment, local regulations, etc.
- ▼ The **DustAlarm® ES** is designed for broken bag detection / leaking filter detection in the exhaust ducts of baghouses of various sizes, cartridge collectors, cyclones, and any other dust collector containing filters which may break or wear out. *See example on back page.*
- ▼ Protect blowers from damage.
- ▼ Typical material applications include, but are not limited to: feed and grain, food processing (flour, sugar, etc.), wood dust, cement, fly ash, foundries, mining and minerals, steel, ferrous or non-ferrous metals, silica dust, enerav. plastics, pharmaceutical and chemical processing.

### OPTIONS

- ▼ **Hazardous Location Approvals available.** (See back page)
- ▼ Continuous trending version available. (**DustTrend™ ES**)
- ▼ Optional Quick-Connect Mounting Kits. (See back page)
- ▼ Available solid coupling probe extensions to provide up to an additional 24” (610mm) of probe length.
- ▼ 316 Stainless Steel probe standard length up to 20” (508mm). [Customer specified probe lengths from 4.75” to 20”.]

### (CSL) Custom Probe Length Measurements

(It is recommended to use a probe length that is 1/3 to 2/3 the diameter [or span] of the duct.)

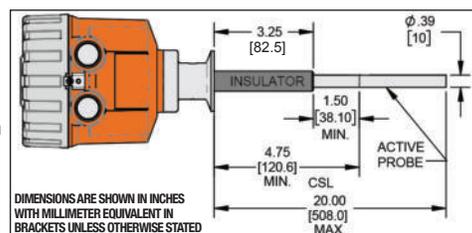

DIMENSIONS ARE SHOWN IN INCHES WITH MILLIMETER EQUIVALENT IN BRACKETS UNLESS OTHERWISE STATED



Missouri Filter & Process Equipment Co  
MOFILCO-Quality, Value, Service  
12025 Manchester Road, Suite 30G  
St Louis MO 63131

314-821-4321 www.mofilco.com  
mofilco@mofilco.com

For detailed information, please contact a representative or visit Monitor's website at [vw.monitortech.com/product\\_pe.shtml](http://vw.monitortech.com/product_pe.shtml) or use this with a smartphone QR-Code app.



**SPECIFICATIONS**

|  |   |
|--|---|
| Power Requirements:                      | 95-240VAC (±10%), 50/60 Hz; 18-28VDC (±10%)   |
| Power Consumption:                       | ≤ 5VA (AC); ≤ 2.5W (DC)   |
| Fuse Breaking Capacity: (Haz-Loc Rating) | 1500A @ 250VAC;<br>300A @ 32VDC   |
| Altitude:                                | 6,562 ft (2000m) max  |
| Installation Category:                   | II  |
| Pollution Degree:                        | 2   |
| Process Temperature:                     | Max: 392°F (200°C) at probe location. (CL II)<br>Class III installations: Process temperature must not exceed 325°F (164°C)   |
| Starting Ambient Temp.:                  | 4° to 149°F (-16° to 65°C)  |
| Running Ambient Temp.:                   | -22° to 149°F (-30° to 65°C)  |
| Ambient Humidity:                        | Max 95% RH, non-condensing  |
| Relay Outputs:                           | 3A @ 250VAC max each  |
| (2 Isolated SPDT)                        | 3A @ 30VDC max each   |
| Relay Setpoint:                          | Factory default: Alarm-1: 5x ref value<br>Alarm-2: 20x ref value  |
| Relay Threshold Range:                   | 1,000,000,000 Max Units   |
| Relay Time Delay:                        | 0 to 60,000 sec (30 sec factory default)  |
| Sensitivity Range:                       | From 0.1 mg/m <sup>3</sup> (0.000044 grains/ft <sup>3</sup> ); Max up to several g/m <sup>3</sup> depending on application.   |
| Fail-Safe State:                         | Alarm   |
| Digital Link, Hardware:                  | RS-485 (3-wire, half duplex, isolated)  |
| Digital Link, Protocol:                  | Modbus RTU  |
| Running Averaging:                       | 0 to 6,553 sec time constant<br>(100 sec factory default)   |
| Local Indicator:                         | Bi-color LED: Green On = Power Applied<br>Green Flashing = Auto Setup<br>Red On = Pre-Alarm<br>Red Flashing = Alarm<br>Alternating Red / Green = Error<br>No Light = No Power   |
| Conduit Connections:                     | (2) 1/2" NPT  |
| Housing:                                 | Powder coated die-cast aluminum;<br>NEMA 4X, ENCLOSURE TYPE 4X, IP66  |
| Mounting:                                | 1" Tri-Clamp Type Quick-Disconnect, 316 SS  |
| Pressure:                                | 87 psi maximum  |
| Insulation Material:                     | PPS (Ryton® or equiv.)  |
| Probe Material:                          | 0.39" diameter, 316 Stainless Steel   |
| Probe Length:                            | Cust. Specified Length - CSL:<br>4.75" (121mm) to 20" (508mm)<br>[Solid coupling extensions up to 24" (610mm) available]  |
| Approvals:                               | MET us/c: Ordinary Locations;<br>Hazardous Locations with intrinsically safe probe [Ex ia]<br><b>US/CAN:</b> Class II, Division 1, Groups E,F,G<br>T85°C...T201°C -30°C ≤ Tamb ≤ +65°C<br>Class III T85°C...T165°C<br>-30°C ≤ Tamb ≤ +65°C<br><b>US:</b> Zone 20 AEx ia ta IIIC<br>T85°C...T201°C Da -30°C ≤ Tamb ≤ +65°C<br><b>CAN:</b> Ex III 1D Ex ia ta IIIC T85°C...<br>T201°C Da -30°C ≤ Tamb ≤ +65°C X<br>ExVeritas® ATEX/IECEX: Ex II 1/2D Ex ia/tb IIIC T93°C...<br>T201°C Da/Db Ta = -30°C to +65°C X |
| Conformity:                              | CE Mark; UKCA Mark (Safe Areas-Only); CHINA RoHS 2  |
| Ship Dims & Weight (Approx.):            | 35.5"Lx8"Wx8"H (902x203x203mm); 7 lbs (3.2kg)   |

**ORDERING INFORMATION**

| DustAlarm® ES               |   |
|-----------------------------|---|
| Select                      | Model Series  |
| 4                           | DustAlarm® ES   |
| Select                      | Configuration   |
| 1                           | Integral Probe / Electronics (Output: Relay and/or RS-485/Modbus) |
| Select                      | Probe Type Note 1   |
| 1                           | Standard Stainless Steel with Ryton® Insulator                    |
| Select                      | Environment / Approvals   |
| 1                           | Ordinary Locations, MET us/c                                      |
| 2                           | Hazardous Locations, MET us/c (North America)                     |
| 3                           | Hazardous Locations, ATEX / IECEX                                 |
| Select                      | Operating Voltage   |
| 1                           | Universal 24 VDC and 100-240 VAC                                  |
| Select                      | Process Connection  |
| 1                           | Tri-Clamp Note 2  |
| <b>18 - 8 4 1 1 - X 1 1</b> | <b>Order Number</b>   |



- NOTE:**
- The probe length signifies the overall insertion length including the insulator. Required: Please provide specified length (CSL) for probe in inches at the end of the product part #. CSL range is 4.75" minimum to 20" maximum. (Example: 18-8411-111-12 for a 12" specified probe length.)
  - Tri-Clamp mounting kits sold separately. Please see "Accessories" section.
  - A standard probe is 20" (508mm) maximum in length. Probe extensions are used to extend the standard dust monitor probe. Example: A standard probe ordered with optional Part # 18-0151-0 with a Customer Specified Length (CSL) of 10" will extend the probe by 10 additional inches. The custom length (CSL) must be provided by the customer in addition to the Probe Extension Part #18-0151-0. For example: #18-0151-0, CSL=10". A probe extension will normally be shipped with the device.

**ACCESSORIES:**

| Part #           | Description  |
|------------------|--|
| 1-2400           | Spanner Wrench, for Cover Removal / Install  |
| 18-8007          | Kit, Mounting, 1" Ferrule Tri-Clamp (Ferrule, Gasket and Clamp)                      |
| 18-8009          | Kit, Mounting, Convert Tri-Clamp to 3/4" NPT (Threaded Ferrule, Gasket and Clamp)    |
| 18-0151-0 Note 3 | Probe Extension, Solid Coupling, Customer Spec Length, 2" (51mm) through 24" (610mm) |

**MECHANICALS**

DIMENSIONS ARE SHOWN IN INCHES WITH MILLIMETER EQUIVALENT IN BRACKETS UNLESS OTHERWISE STATED

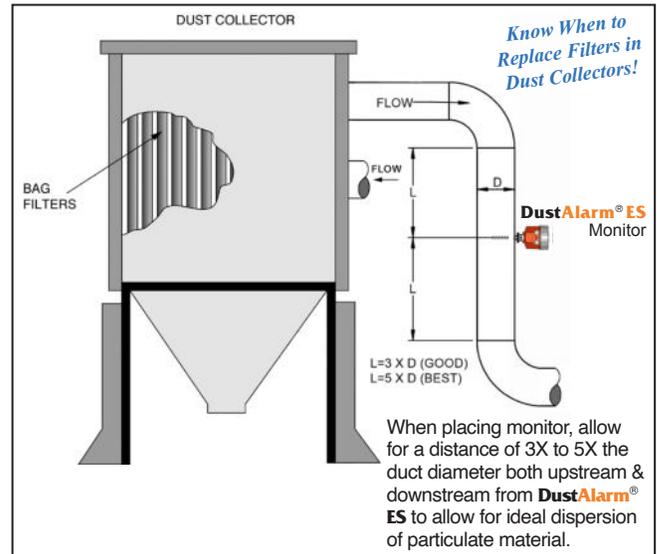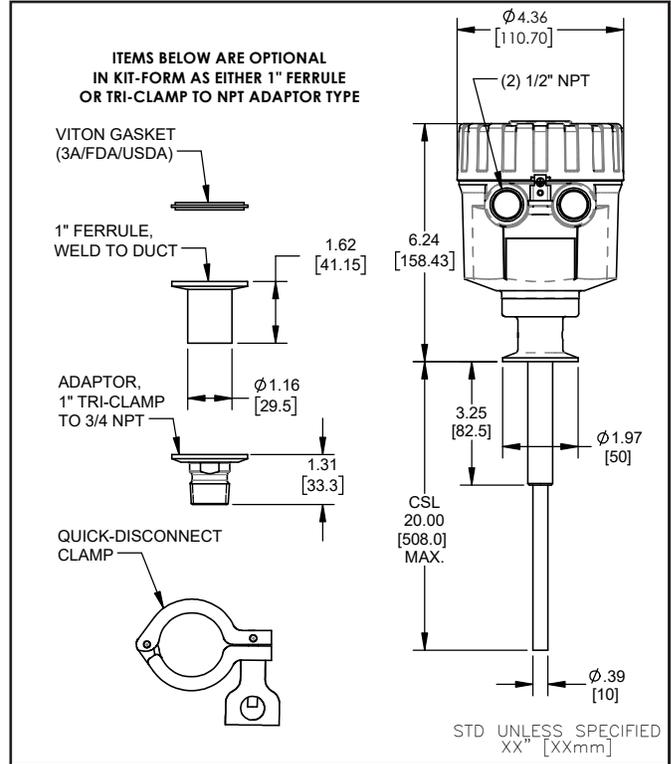

Application Example

Information on this sheet is subject to change without notice



**MONITOR TECHNOLOGIES, LLC**

44W320 Keslinger Road, Elburn, IL 60119 USA

Tel: 1-630-365-9403 ▼ In US/CAN 1-800-766-6486

Fax: 1-630-365-5646 ▼ [monitor@monitortech.com](mailto:monitor@monitortech.com)

[www.monitortech.com](http://www.monitortech.com)



Blog: [www.monitortech.typepad.com](http://www.monitortech.typepad.com)

## DustTrend™ ES Dust Emission Trend Monitor

### FEATURES & ADVANTAGES

- ▼ **Easy Set-up and Calibration...Set it and forget it!**
  - ▼ The easy auto set-up function is activated by pressing a button to automatically establish a "clean air baseline", scale the 4-20 mA output range and set the alarms.
  - ▼ Quick-connect mounting provides for ease of installation or maintenance.
- ▼ **Process Optimization**
  - ▼ 4-20 mA output and/or enhanced Modbus communications available as standard.
  - ▼ Provides continuous trend measurements that allow plant operators to identify changes in dust emission levels and optimize the facility's filtration systems.
  - ▼ Monitor the efficiency of dust collection systems and know the optimal time to replace filters.
  - ▼ Monitor for unexpected events that can cost time, money, material loss, equipment damage and other problems.
- ▼ **Digital Communications and Software Capabilities**
  - ▼ Digital RS-485(Modbus) connection as an alternative to analog / relay outputs and/or for connecting multiple sensors to one control system.
  - ▼ Connect with the free **DustConfig™** software to set custom alarm points, view live activity within the duct, or review data history for up to a 24-hour period.
- ▼ **Exceptional and Reliable Sensitivity**
  - ▼ Uses proven AC Triboelectric technology with advanced algorithms to filter out the noise and provide the most accurate dust measurement.
  - ▼ Capable of detecting minute amounts of particles passing the probe.
  - ▼ Excellent repeatability not affected by variations in relative humidity, process temperature or pressure.
  - ▼ Unique probe design with extended Ryton® insulator helps protect the unit from false signaling due to product build up.
- ▼ **Superior Third Party Approval Compliance**
  - ▼ Ordinary and Hazardous location approvals.
  - ▼ Intrinsically safe probe for ultimate hazardous location protection.

*Practical Tip*  
DustTrend ES is ideal for identifying trends of increasing dust emission levels.

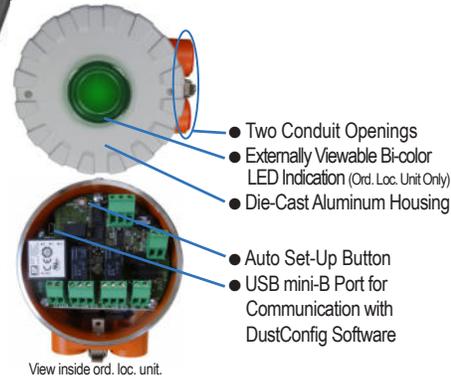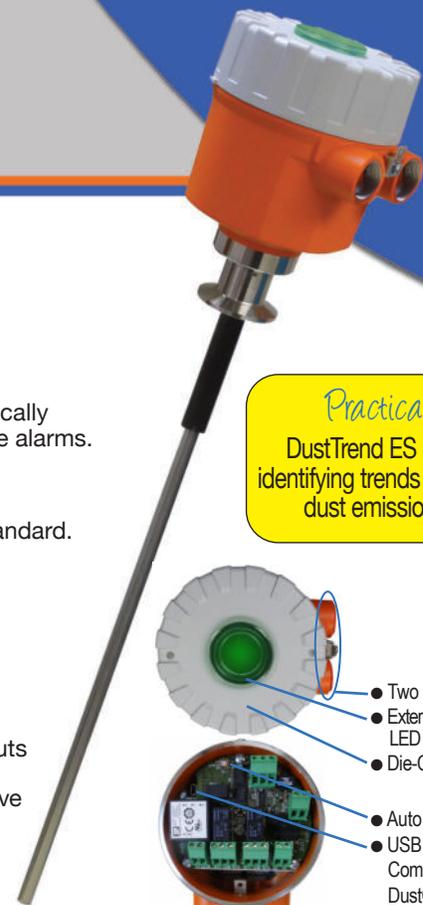

### PRINCIPLE OF OPERATION

AC Triboelectric technology has been used for dust trend monitoring for many years and is an accepted technology by the US EPA for dust particle emission detection (40 CFR Sec 63.1350).

The Triboelectric effect is based on particles interacting with an electrically isolated sensing probe. When moving particles pass in close proximity to the probe a very small electrical charge is transferred from the particulate to the probe. This electrical signal is then processed by the **DustTrend™ ES** via a series of advanced algorithms. The signal processing filters out other electrical charges, or electrical 'noise', which is not representative of the moving particles. These proprietary algorithms effectively differentiate undesirable signals from the desirable signal resulting in reliable particle emissions detection.

The **DustTrend™ ES** is designed to provide a relative measurement of the concentration of dust within the exhaust air stream of a dust collection system and can also provide alarm outputs when pre-set thresholds are exceeded. See Bulletin #774A for more details.

### PRACTICAL APPLICATIONS


- ▼ Provides monitoring of dust emission levels and early leak detection where it is critical to safety, maintenance, equipment operation, cost-savings, reducing material loss, plant efficiency (energy-savings), good "housekeeping", employee welfare, environment, local regulations, etc.
- ▼ The **DustTrend™ ES** provides trend monitoring and broken bag detection in the exhaust ducts of baghouses of various sizes, cartridge collectors, cyclones, and any other dust collector containing filters which may break or wear out. *See example on back page.*
- ▼ Alternative to opacity detection.
- ▼ Typical material applications include, but are not limited to: feed and grain, food processing (flour, sugar, etc.), wood dust, cement, fly ash, foundries, mining and minerals, steel, ferrous or non-ferrous metals, silica dust, energy, plastics, pharmaceutical and chemical processing.

### OPTIONS

- ▼ **Hazardous Location Approvals are available.** (See back page)
- ▼ Optional Quick-Connect Mounting Kits. (See back page)
- ▼ Available solid coupling probe extensions to provide up to an additional 24" (610mm) of probe length.
- ▼ 316 Stainless Steel probe standard length up to 20" (508mm). [Customer specified probe lengths from 4.75" to 20".]

### (CSL) Custom Probe Length Measurements

(It is recommended to use a probe length that is 1/3 to 2/3 the diameter [or span] of the duct.)

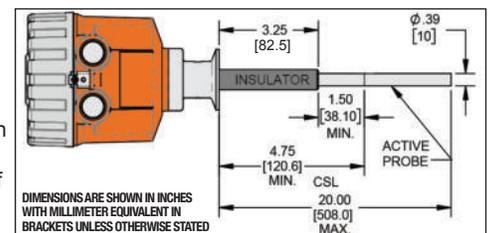



## SPECIFICATIONS

|                               |  |
|-------------------------------|--|
| Power Requirements:           | 95-240VAC (±10%), 50/60 Hz; 18-28VDC (±10%)  |
| Power Consumption:            | ≤ 5VA (AC); ≤ 2.5W (DC)  |
| Fuse Breaking Capacity:       | 1500A @ 250VAC;<br>(Haz-Loc Rating)<br>300A @ 32VDC  |
| Altitude:                     | 6,562 ft (2000m) max   |
| Installation Category:        | II   |
| Pollution Degree:             | 2  |
| Process Temperature:          | Max: 392°F (200°C) at probe location. (CL II)<br>Class III installations: Process temperature must not exceed 325°F (164°C)  |
| Starting Ambient Temp.:       | 4° to 149°F (-16° to 65°C)   |
| Running Ambient Temp.:        | -22° to 149°F (-30° to 65°C)   |
| Ambient Humidity:             | Max 95% RH, non-condensing   |
| Relay Outputs:                | 3A @ 250VAC max each   |
| (2 Isolated SPDT)             | 3A @ 30VDC max each  |
| Relay Setpoint:               | Factory default: Alarm-1: 5x ref value<br>Alarm-2: 20x ref value   |
| Relay Threshold Range:        | 1,000,000,000 Max Units  |
| Relay Time Delay:             | 0 to 60,000 sec (30 sec factory default)   |
| Sensitivity Range:            | From 0.1 mg/m <sup>3</sup> (0.000044 grains/ft <sup>3</sup> ); Max up to several g/m <sup>3</sup> depending on application.  |
| Fail-Safe State:              | Alarm  |
| Digital Output, Hardware:     | RS-485 (3-wire, half duplex, isolated)   |
| Digital Output, Protocol:     | Modbus RTU   |
| Analog Output:                | 4-20mA (self powered, isolated, 0-250 Ω loop)  |
| Running Averaging:            | 0 to 6,553 sec time constant<br>(100 sec factory default)  |
| Local Indicator:              | Bi-color LED: Green On = Power Applied<br>Green Flashing = Auto Setup<br>Red On = Pre-Alarm<br>Red Flashing = Alarm<br>Alternating Red / Green = Error<br>No Light = No Power  |
| Conduit Connections:          | (2) 1/2" NPT   |
| Housing:                      | Powder coated die-cast aluminum;<br>NEMA 4X, ENCLOSURE TYPE 4X, IP66   |
| Mounting:                     | 1" Tri-Clamp Type Quick-Disconnect, 316 SS   |
| Pressure:                     | 87 psi maximum   |
| Insulation Material:          | PPS (Ryton® or equiv.)   |
| Probe Material:               | 0.39" diameter, 316 Stainless Steel  |
| Probe Length:                 | Cust. Specified Length - CSL:<br>4.75" (121mm) to 20" (508mm)<br>[Solid coupling extensions up to 24" (610mm) available]   |
| Approvals:                    | MET us/c: Ordinary Locations;<br>Hazardous Locations with intrinsically safe probe [Ex ia]<br><b>MET</b> us/c<br><b>US/CAN:</b> Class II, Division 1, Groups E,F,G<br>T85°C...T201°C -30°C ≤ Tamb ≤ +65°C<br>Class III T85°C...T165°C<br>-30°C ≤ Tamb ≤ +65°C<br><b>US:</b> Zone 20 AEx ia ta IIIC<br>T85°C...T201°C Da -30°C ≤ Tamb ≤ +65°C<br><b>CAN:</b> Ex III 1D Ex ia ta IIIC T85°C...<br>T201°C Da -30°C ≤ Tamb ≤ +65°C X<br>ExVeritas® ATEX/IECEx: Ex II 1/2D Ex ia/tb IIIC T93°C...<br>T201°C Da/Db Ta = -30°C to +65°C X |
| Conformity:                   | CE Mark; UKCA Mark (Safe Areas-Only); CHINA RoHS 2   |
| Ship Dims & Weight (Approx.): | 35.5"Lx8"Wx8"H (902x203x203mm); 7 lbs (3.2kg)  |

## ORDERING INFORMATION

| DustTrend™ ES       |   |
|---------------------|---|
| Select              | Model Series  |
| 5                   | DustTrend™ ES   |
| Select              | Configuration   |
| 1                   | Integral Probe / Electronics (Output: Analog, Relay and/or RS-485/Modbus) |
| Select              | Probe Type Note 1   |
| 1                   | Standard Stainless Steel with Ryton® Insulator                            |
| Select              | Environment / Approvals   |
| 1                   | Ordinary Locations, METus/c   |
| 2                   | Hazardous Locations, METus/c (North America)                              |
| 3                   | Hazardous Locations, ATEX / IECEx   |
| Select              | Operating Voltage   |
| 1                   | Universal 24 VDC and 100-240 VAC  |
| Select              | Process Connection  |
| 1                   | Tri-Clamp Note 2  |
| <b>18 - 8</b>       | <b>5</b>  |
| <b>1</b>            | <b>1 - X</b>  |
| <b>1</b>            | <b>1</b>  |
| <b>Order Number</b> |   |

### NOTE:



- The probe length signifies the overall insertion length including the insulator. Required: Please provide specified length (CSL) for probe in inches at the end of the product part #. CSL range is 4.75" minimum to 20" maximum. (Example: 18-8411-111-12 for a 12" specified probe length.)
- Tri-Clamp mounting kits sold separately. Please see "Accessories" section.
- A standard probe is 20" (508mm) maximum in length. Probe extensions are used to extend the standard dust monitor probe. Example: A standard probe ordered with optional Part # 18-0151-0 with a Customer Specified Length (CSL) of 10" will extend the probe by 10 additional inches. The custom length (CSL) must be provided by the customer in addition to the Probe Extension Part #18-0151-0. For example: #18-0151-0, CSL=10". A probe extension will normally be shipped with the device.

### ACCESSORIES:

| Part #           | Description  |
|------------------|--|
| 1-2400           | Spanner Wrench, for Cover Removal / Install  |
| 18-8007          | Kit, Mounting, 1" Ferrule Tri-Clamp (Ferrule, Gasket and Clamp)                      |
| 18-8009          | Kit, Mounting, Convert Tri-Clamp to 3/4" NPT (Threaded Ferrule, Gasket and Clamp)    |
| 18-0151-0 Note 3 | Probe Extension, Solid Coupling, Customer Spec Length, 2" (51mm) through 24" (610mm) |

## MECHANICALS

DIMENSIONS ARE SHOWN IN INCHES WITH MILLIMETER EQUIVALENT IN BRACKETS UNLESS OTHERWISE STATED

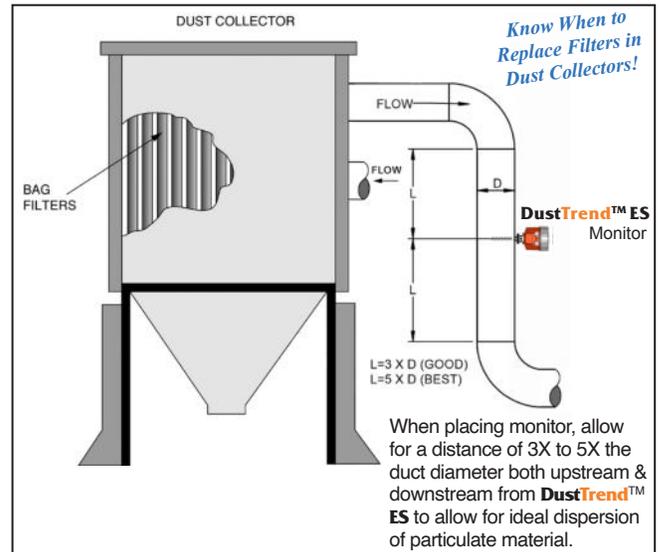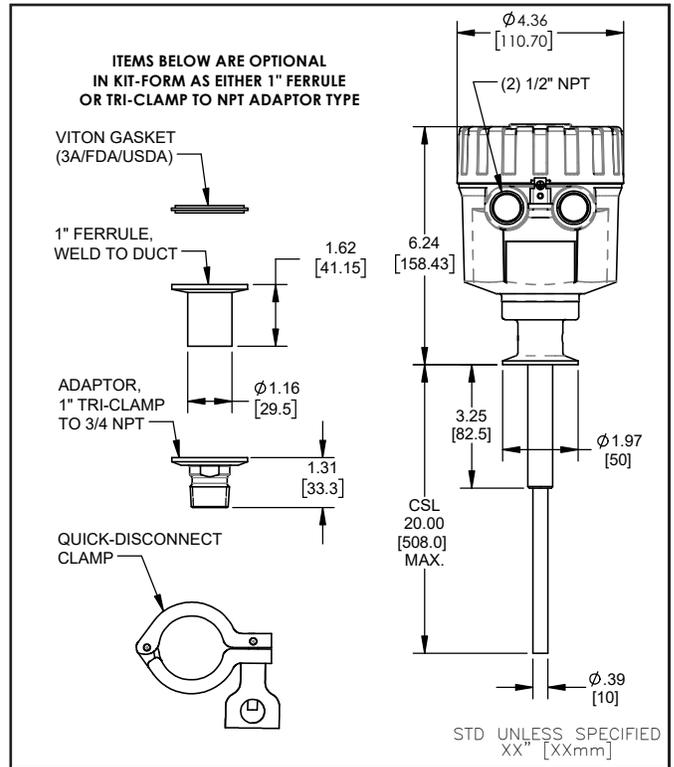

Application Example

Information on this sheet is subject to change without notice



## MONITOR TECHNOLOGIES, LLC

44W320 Keslinger Road, Elburn, IL 60119 USA

Tel: 1-630-365-9403 ▼ In US/CAN 1-800-766-6486

Fax: 1-630-365-5646 ▼ [monitor@monitortech.com](mailto:monitor@monitortech.com)

[www.monitortech.com](http://www.monitortech.com)

Blog: [www.monitortech.typepad.com](http://www.monitortech.typepad.com)